




Listening squawks and LARS

Set your transponder to the listening squawk and listen out on the corresponding frequency.

A squawk does not clear you into controlled airspace, and you are not receiving an ATC service.

When you leave the area or change frequency, change the transponder code back to 7000.

8.33 kHz changes: Pilots are to refer to the AIP supplement and associated NOTAM to check 8.33 kHz changes before each flight.

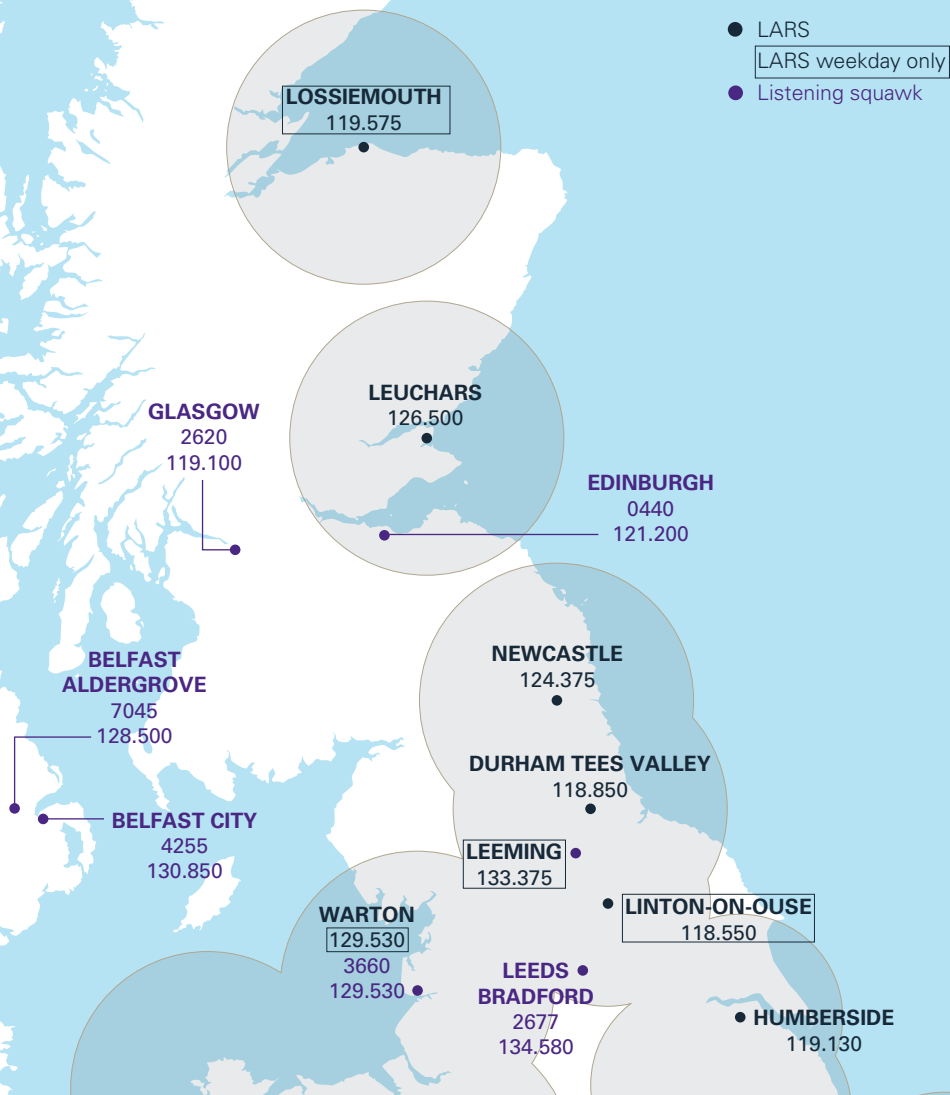

Listening squawks and LARS

Set your transponder to the listening squawk and listen out on the corresponding frequency.

A squawk does not clear you into controlled airspace, and you are not receiving an ATC service.

When you leave the area or change frequency, change the transponder code back to 7000.

8.33 kHz changes: Pilots are to refer to the AIP supplement and associated NOTAM to check 8.33 kHz changes before each flight.

